


# Order by 5pm for Next Day Delivery

## Technical Drawings

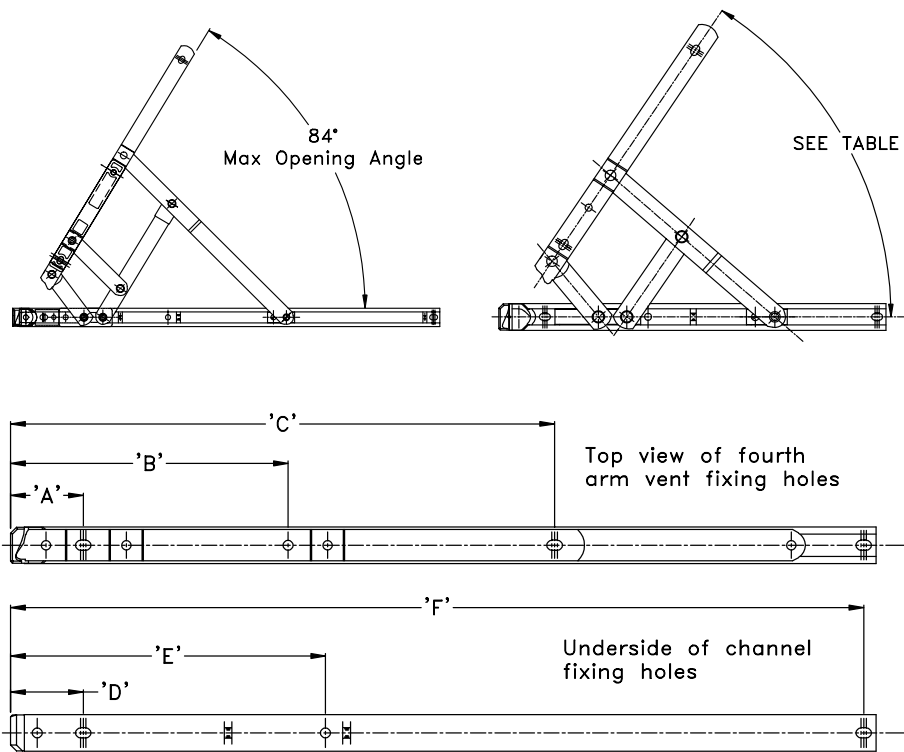

### Fixing Hole Details

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Side Hung 10"	34.7	62.1	192.4	31.0	100.5	254.8
Side Hung 16"	34.5	137.5	271.4	36.3	157.3	407.1

### Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Side Hung	10"	600	1200	16	80°
Side Hung	16"	600	1200	21	84°

## iDeal Egress Stays provide an emergency exit facility for side hung casement windows.

iDeal Friction Stays allow casement windows to satisfy the emergency egress requirements of Approved Document B of the Building Regulations.

- Manufactured from high grade Austenitic (304) and Ferritic (430) stainless steel which one?
- Suitable for side hung applications
- Recommended maximum sash weight - 21 kg
- Available in 13mm or 17mm stack height
- Available in sizes 10" or 16"
- Successfully tested to 50, 000 cycles
- Achieves 96 hours salt spray test
- Secured By Design licensed product
- BBA approved product
- Box quantity: 50



### Part Numbers

Description	Size (")	13mm Stack Height	17mm Stack Height
Side Hung	10"	022926	022976
Side Hung	16"	022928	022978

### Guarantees & Accreditations

**2** Labour Guarantee **10** Mechanical Guarantee  
years years

visit us today at

[www.mila.co.uk](http://www.mila.co.uk)

call our sales team today on

**01327 312 400**