


# Order by 5pm for Next Day Delivery



## Technical Drawings

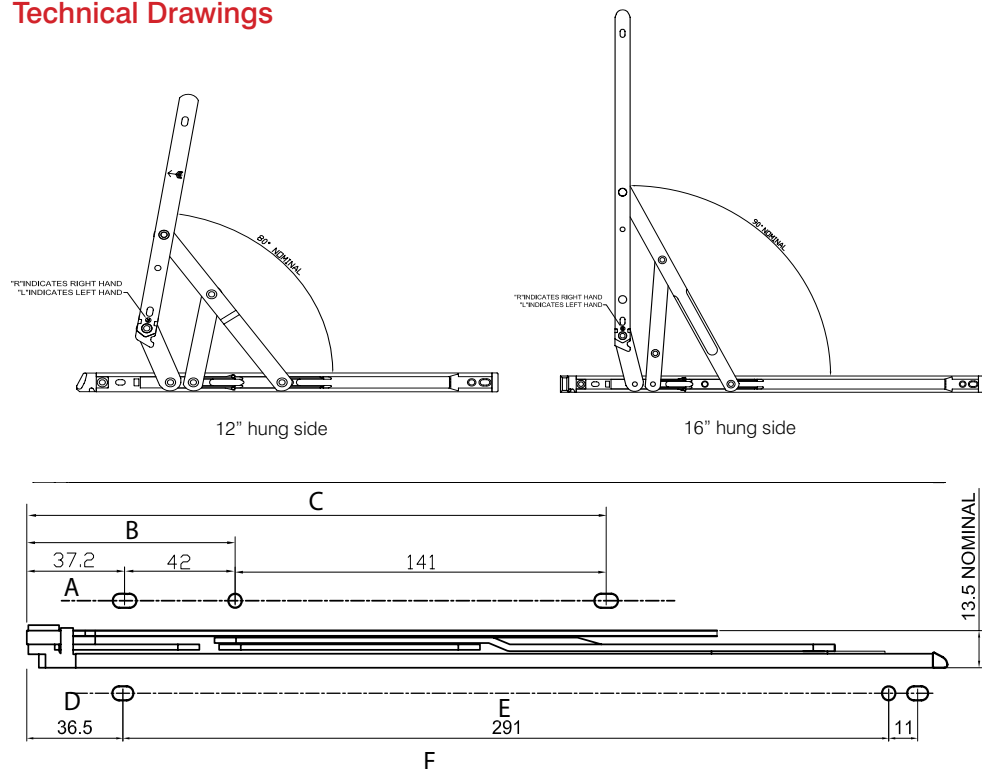

### Fixing Hole Details

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Side Hung 12"	37.2	79.2	220.2	36.5	291	338.5
Side Hung 16"	37.2	142.7	355.2	36.5	385.45	432.95

### Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Side Hung	12	600	1200	18	80°
Side Hung	16	600	1200	21	90°

## iDeal Egress Easy-Clean Friction Stays combine emergency exit requirements with an easy-clean facility for side hung casement windows.

- Manufactured from stainless steel
- Suitable for side hung egress applications
- Almost 90° opening for easy egress
- Allows casement windows (dependent upon size) to satisfy the egress requirements of Document B of the Building Regulations, ie:  
" For emergency egress any window should have an unobstructed openable area that is at least 0.33m square and at least 450mm high and 450mm wide "
- Handed nylon end-cap for smooth operation and accurate location
- Recommended maximum sash weight - 21 kg
- Side hung application sizes available: 12" or 16"
- Available in 13mm or 17mm stack height
- Successfully tested to 50, 000 cycles
- Achieves 96 hours salt spray test
- Box quantity: 25



### Part Numbers

Description	Size (")	13mm Stack Height	17mm Stack Height
Side Hung	12	023438C	023488C
Side Hung	16	023440C	023490C

### Guarantees & Accreditations

**2** Labour Guarantee **10** Mechanical Guarantee  
years years

visit us today at

[www.mila.co.uk](http://www.mila.co.uk)

call our sales team today on

**01327 312 400**