


Technical Data

Type	2 Pin
Operation	Cylinder/key
Pz (mm)	92
Backset (mm)	25, 28, 30, 35, 40, 45
Faceplate (mm)	16 or 24mm U

Material Specification

Lock Case	Steel acc. En 10149/zinc plated
Face Plate	Steel acc. En 10149
Latch Bolt	Zinc diecasting acc. 1743-2/nickel plated En 12540
Deadbolt	Zinc diecasting acc. 1743-2/nickel plated En 12540
Spindle Square	Brass acc. DIN 1709
Handle-Spring Housing	Zinc diecasting acc.. 1743-2/yellow bichromated En 12330
Handle-Spring	Steel acc. DIN 2076-D
Drive Gear	Steel acc. En 10149
Slider	Steel acc. En 10149/zinc plated
Tumbler	Zinc diecasting acc. 1743-2/nickel plated En 12540
Tumbler Spring	Steel acc. DIN 2076-D
Box Quantity	5

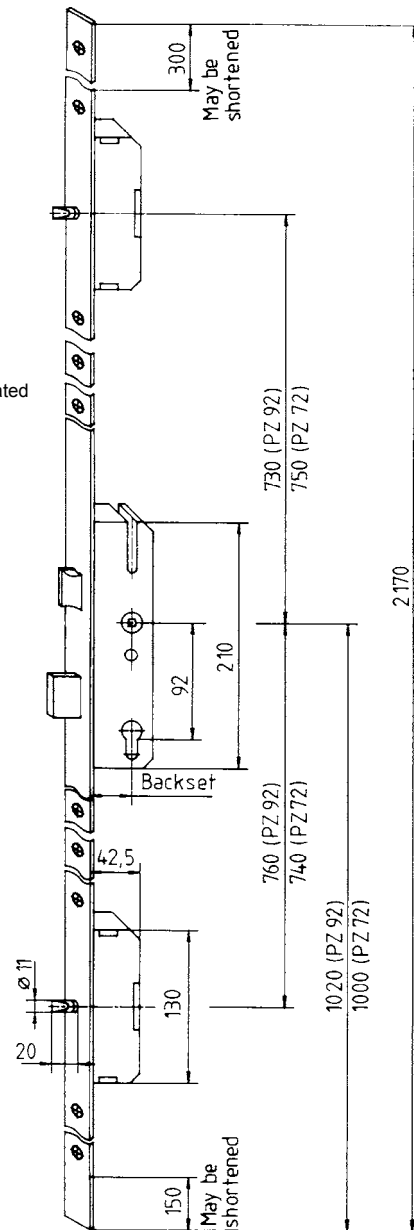

AS 2300 2 Pin

High security locking system for residential doors which features the day latch facility usually associated with traditional rim latches but has the vital benefit of multipoint locking and sealing.

The lock is a key/cylinder operated multipoint lock featuring 2 round bolts a reversible latch and an anti-saw deadbolt as standard.

- Key/cylinder operated with day latch facility
- Deadbolt has double throw (20mm)
- Round bolts provide compression and an element of security
- Suits standard 92mm Pz handles
- Available in a range of backsets and with a 24mm "U-track" faceplate to special order

Part Numbers

Description	Type	Backset (mm)	Pins	Part No. 24mm U	Part No. 16mm Flat
AS 2300 Multipoint Lock	Standard	25	2	-	045400*
AS 2300 Multipoint Lock	Standard	30	2	-	045402*
AS 2300 Multipoint Lock	Standard	35	2	045428	045404
AS 2300 Multipoint Lock	Standard	40	2	045432*	045406*
AS 2300 Multipoint Lock	Standard	45	2	045436*	045408

* Special order only

Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years



to place your order simply call our sales team directly on 01327 312 400