


Technical Data

Type	2 hook, 4 roller
Operation	Lever/lever or lever/pad
Pz (mm)	92
Backset (mm)	35
Faceplate (mm)	16
Material Specification	
Lock case	Steel acc. En 10149/zinc plated
Face plate	Steel acc. En 10149
Latch bolt	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Deadbolt	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Hook bolt	Steel/nickel plated En 12540
Spindle square	Brass acc. DIN 1709
Handle-spring housing	Zinc diecasting acc.. 1743-2
Handle-spring	Steel acc. En 2076
Drive gear	Steel acc. En 10149
Slider	Steel acc. En 10149/zinc plated
Tumbler	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Tumber spring	Steel acc. DIN 2076-D
Box Quantity	5

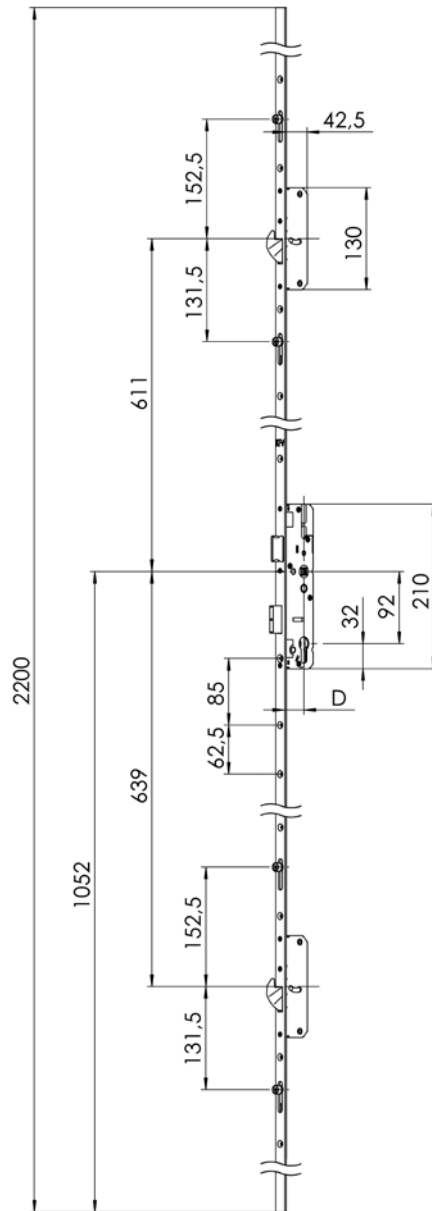

AS 7922 2 Hook, 4 Roller

The AS 7922 multipoint lock is suitable for all applications. In its basic form it is a high security residential door lock. Through the use of a split spindle it will provide "rim latch" type operation. The addition of shootbolts top and bottom enables it to be used as the master door lock on a pair of french doors.

Lever operated, the AS 7922 features 2 hardened steel hooks, 4 roller cams, a reversible latch and an anti-saw deadbolt as standard.

- Suits all standard 92mm pz handles - no special requirements
- Twin hardened steel hooks for security and adjustable roller cams for compression
- Lever/lever - lever/pad - one lock - all options
- Option of standard lever/lever or "day latch" operation without modification, therefore reducing stock requirements
- Option of adding shootbolts top and bottom for high security residential or french doors

Description	Type	Backset (mm)	Hooks	Rollers	Part No.
AS 7922	Standard	35	2	4	047988
AS 7922 XL	Split Spindle	35	2	4	047989
Shootbolt Set	Security	-	-	-	UNISBK
Split Spindle Kit	54/54				059280
Split Spindle Kit	54/64				059281
Split Spindle Kit	54/74				059282

Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years

