


Technical Data

Type	2 hook, 2 roller
Operation	Lever/lever or lever/pad
Pz	92 / 70
Backset (mm)	35
Faceplate (mm)	16

Material Specification

Faceplate & Operating Rod	FE490 roller annealed 15.9 x 2.5 A VFMG zincotropicalized 12 - 15 VM
Gearbox/Cover	Aluzinc B500 to EN 10215 hot zinc (zinc alloy 5590) - 20 VM
Zinc alloy components	2410 ZNAL 4CV1 to EN 1774 (UNI 3717)
Sintered components	SINT D30 - 39 to DIM 30910 zinc plated white 8 VM
Internal zinc components	FE390 - 490 cold rolled to EN 10204
Screws	UNI 8109 - 8113 coated FE ZN 5UM
Box Quantity	10

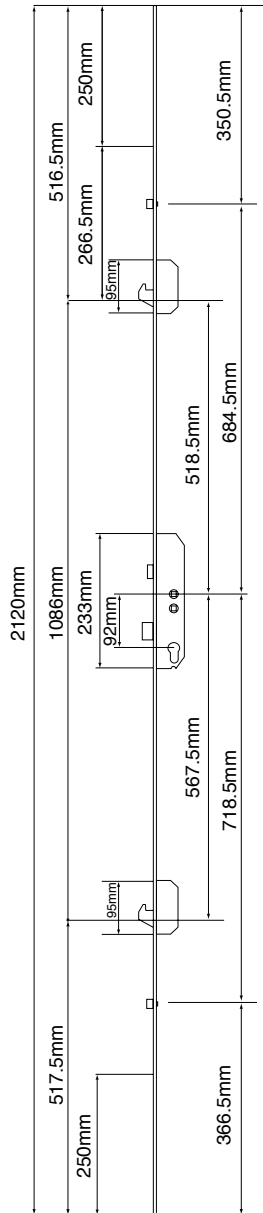

M-Fear Twin Spindle 2 Hook, 2 Roller

The M-Fear twin spindle lock combines the security advantages of a traditional one-piece multipoint lock with the benefits of a rim latch type function.

The M-Fear features:

- Twin cast steel hooks
- Reversible latch bolt
- Centre deadbolt
- Twin roller cams, compression adjustable +/-1mm
- Roller cams placed "outside" hooks to enhance sealing at the head and cill of the door
- Twin spindle type operation
- Option of adding shootbolts top and bottom for high security residential or french doors
- Full french door suite available within the range, including slave door lock

Part Numbers

Description	Type	Backset	Hooks	Rollers	Part No.
M-Fear	Twin Spindle	35	2	2	047128
Shootbolt	Normal Action	-	-	-	047197
Shootbolt	Reverse Action	-	-	-	047198

Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years

Optional



Optional

to place your order simply call our sales team direct on 01327 312 400