


Technical Drawings

Type	Slave
Operation	Lever/lever
Pz (mm)	92
Backset (mm)	35
Faceplate (mm)	16

Material Specification

Faceplate & Operating Rod	FE490 roller annealed 15.9 x 2.5 A VFMG zincotropicalized 12 - 15 VM
Gearbox/Cover	Aluzinc B500 to EN 10215 hot zinc (zinc alloy 5590) - 20 VM
Zinc alloy components	2410 ZNAL 4CV1 to EN 1774 (UNI 3717)
Sintered components	SINT D30 - 39 to DIM 30910 zinc plated white 8 VM
Internal zinc components	FE390 - 490 cold rolled to EN 10204
Screws	UNI 8109 - 8113 coated FE ZN 5UM

Box Quantity	10
--------------	----

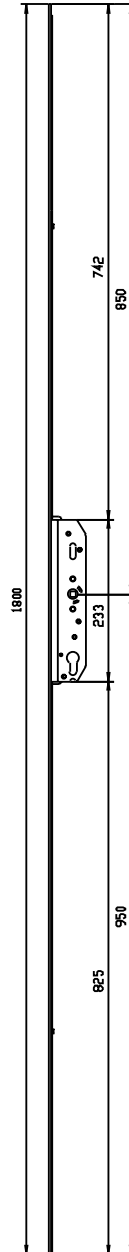

Mila Multipoint Slave

The Mila slave lock is for use on the slave leaf of a pair of french doors, featuring smooth lever operation, cylinder locking and shootbolts top and bottom.

All shootbolts secure into adjustable french door keeps for optimum compression at the top and bottom of the door.



Part Numbers

Description	Type	Backset	Part No
Multipoint Slave Lock	Slave	35	047065
Shootbolt	Normal Action	-	046311C
Shootbolt	Reverse Action	-	046313C

Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years

to place your order simply call our sales team direct on 01327 312 400