


Technical Data

Application	Egress, side hung
Stack Height (mm)	13, 17
Size (inches)	12 & 16
Max. Sash Weight (kg)	21
Material Specification:	
Stainless Steel	Type 430 to BS EN 10088-2 (BS 1449) or type 304 to BS EN 10259.1.4.016
End Cap	Acetal / Tenac 4520
Slider	Acetal / Tenac 4010
Box Quantity	50

Technical Drawings

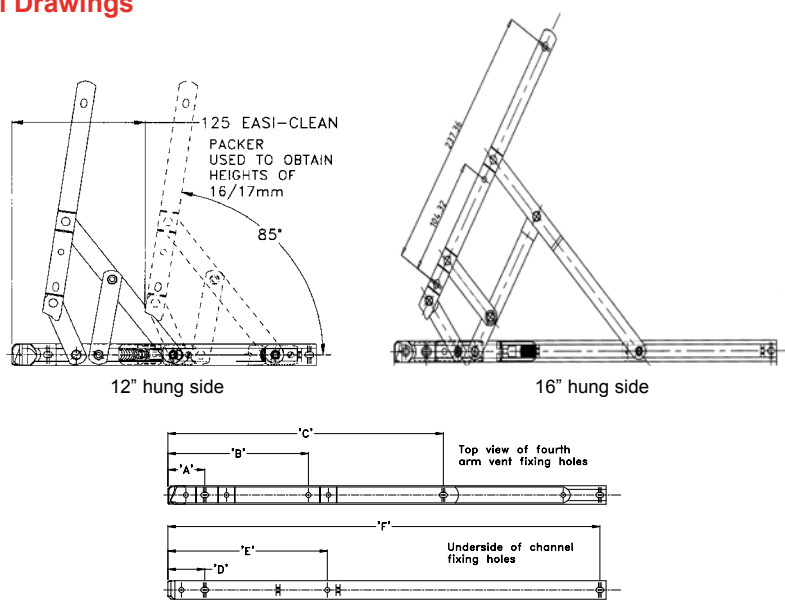

Fixing Hole Details

Description	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Side Hung 12"	34.2	61.8	208.3	31.4	41.4	305.7
Side Hung 16"	34.4	138.4	271.4	31.3	41.3	407.2

EZ Egress Friction Stay

The EZ friction stay offers an egress function, for side hung casement windows, without the need for any special tools or reset kits.

- Allows casement windows to open to a full 90° for emergency exit
- Allows casement windows (dependent upon size) to satisfy the requirements of Document B of the Building Regulations, ie:

“ For emergency egress any window should have an unobstructed openable area that is at least 0.33m square and at least 450mm high and 450mm wide ”
- Option of easy clean facility
- Easy clean position meets the requirements of BS 8213 (minimum 95mm gap between casement and frame)
- Suitable for side hung casement windows



Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Side Hung	12	600	1200	18	85°
Side Hung	16	600	1200	21	89°

Part Numbers

Description	Size (")	Austenitic 13mm Stack Height	Austenitic 17mm Stack Height	Ferritic 13mm Stack Height	Ferritic 17mm Stack Height
Side Hung	12	023224A*	023225A*	023224	023225
Side Hung	16	023226A*	-	023226	023227

* When using as a side hung stay, use restricted hinge on the bottom and a standard Sinindex on the top

Guarantees & Accreditations

Mechanical Guarantee	10 years
Labour Guarantee	2 years

to place your order simply call our sales team direct on 01327 312 400