


## Technical Data

Application	Restricted, side & top hung
Stack Height (mm)	13, 17
Size (inches)	12, 16, 20, 24
Max. Sash Weight (kg)	Top hung = 32, side hung = 20
Material Specification:	
Stainless steel	Type 430 to BS EN 10088-2 (BS 1449) or type 304 to BS EN 10259.1.4.016
End cap	Acetal / tenac 4520
Slider	Acetal / tenac 4010
Box Quantity	HSR201-12" & HSR24-24" = 25 HSR216-16" & HSR20-20" = 50

## Technical Drawings

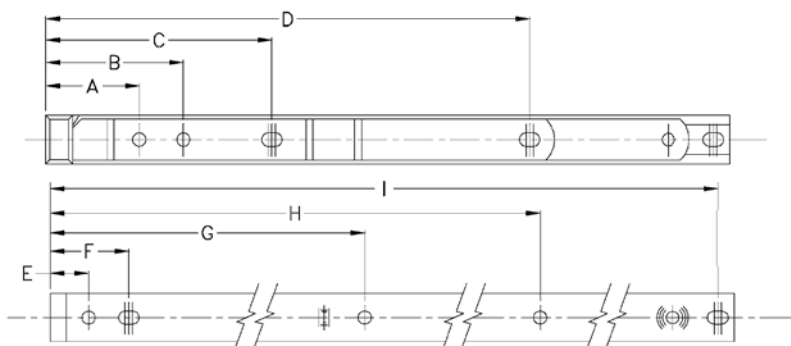

## Fixing Hole Details

Description	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)
Top Hung 16"	36.2	53.0	166.4	260.4	15.5	30.5	226.2	-	407.2
Top Hung 20"	36.2	53.0	217.2	311.2	15.5	30.5	217.8	-	508.7
Top Hung 24"	36.2	53.0	268.0	362.0	15.5	30.5	217.5	405.3	610.4
Side Hung 12"	32.6	-	114.8	212.7	279.3	15.5	30.5	226.6	305.7
Side Hung 16"	36.2	53.0	165.5	314.3	380.9	15.5	30.5	226.2	407.0

## Sinidex Restricted Friction Stay

The Sinidex restricted friction stay offers improved security and weather sealing through the use of a nylon, reduced friction, end-cap. It has been designed to offer smooth closure and high performance for window applications of all sizes.

- Manufactured from high grade Austenitic (304) and Ferritic (430) stainless steel
- Enhanced security friction stay for top hung & side hung casement windows
- Available in 16", 20" and 24" for top hung applications
- Available in 12" for side hung applications
- Secured By Design licensed product



## Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Top hung	16	700	1300	24	50°
Top hung	20	900	1200	24	42°
Top hung	24	1200	1200	32	47°
Side hung	12	650	1250	20	59°

## Part Numbers

Description	Hand	Size (")	Austenitic		Ferritic	
			13mm SH	17mm SH	13mm SH	17mm SH
Top Hung	Right	16	023529A	023589A	023529C	023589C
Top Hung	Left	16	023533A	023593A	023533C	023593C
Top Hung	Right	20	023530A	023590A	023530C	023590C
Top Hung	Left	20	023534A	023594A	023534C	023594C
Top Hung	Right	24	023531A	023591A	023531C	023591C
Top Hung	Left	24	023535A	023595A	023535C	023595C
Top Hung	Right	12	023528A	023588A	023528C	023588C
Top Hung	Left	12	023532A	023592A	023532C	023592C
Side Hung	Right	16	023529A	023589A	023529C	023589C
Side Hung	Left	16	023533A	023593A	023533C	023593C

\* when using as a side hung stay, use restricted hinge on the bottom and a standard Sinidex on the top

## Guarantees & Accreditations

Mechanical Guarantee	10 years	BBA Approved	Yes
Labour Guarantee	2 years	SBD Product	Yes



Report No. 2161A

to place your order simply call our sales team direct on 01327 312 400