

ProSecure TBT window locking system

Concealed and visible hinges High security as standard

Secured by Design





ProSecure TBT Window Locking System

with concealed and visible hinges

The ProSecure TBT window locking system is a Police Preferred Specification product. It is available in two versions - with visible or concealed hinges.

The systems jigless design is simple to install, with 100° sash opening for ease of fabrication. There are a wealth of features including an anti-blow back detail and it carries 130kg sash weight as standard.

The ProSecure TBT range has been independently tested to the latest European and British Standards both at IFT Rosenheim in Germany and at the Mila Test Centre to all of the required operational reliability, security and corrosion resistance standards.



The range has been security tested to PAS24: 2016, is Secured by Design and is backed with a market-leading 10 year guarantee.

Quality, not compromise.



Anti-blowback device automatically engages when in tilt position



Easy to assemble corner hinges and adjustment point



Suited window furniture available



High security locking as standard



Security as Standard




Certified at Europe's largest, leading test house as well as in the UK to British Standards



ProSecure TBT window Locking System

with visible hinges

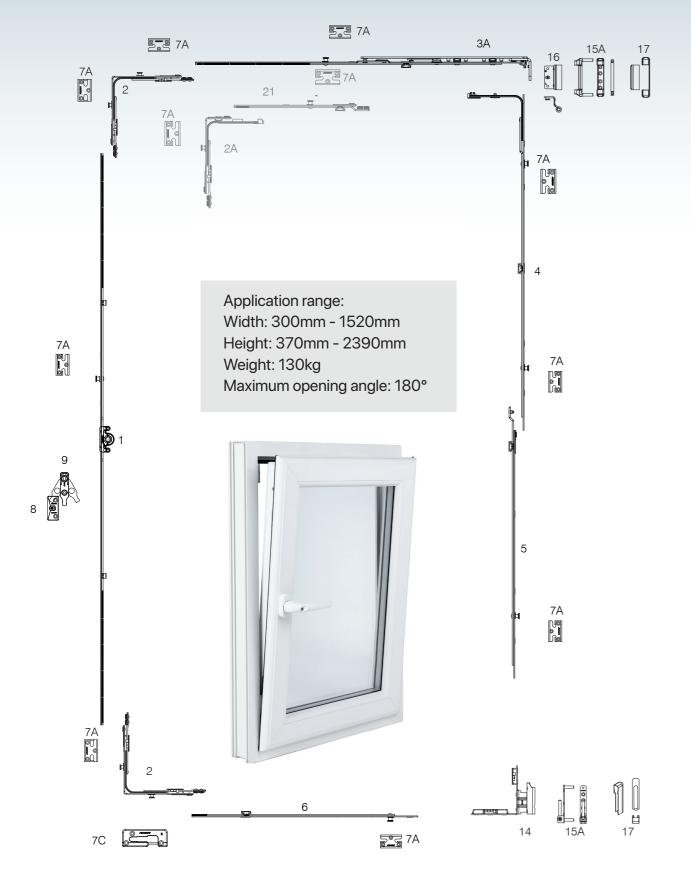


| No. | Description | Application range by width | Application range by height | Part No. |
|-----|--|----------------------------|-----------------------------|----------------|
| 1 | Gear variable 0, L=250, 450-550 | - | 450-550 | K1131-02-N03 |
| 1 | Gear variable 1, L=450, 551-750 | - | 551-750 | K1131-04-N03 |
| 1 | Gear variable 2, L=930, 751-1230, 1 ML, security | - | 751-1230 | K1131-09-N03 |
| 1 | Gear variable 3, L=1130, 950-1430, 1 ML, security | - | 950-1430 | K1131-11-N03 |
| 1 | Gear variable 4, L=1410, 1231-1710, 2 ML, security | - | 1231-1710 | K1131-14-N03 |
| 1 | Gear variable 5, L=1610, 1431-1910, 2 ML, security | - | 1431-1910 | K1131-16-N03 |
| 1 | Gear variable 6,L=2090, 1911-2390, 3 ML, security | - | 1911-2390 | K1131-21-N03 |
| 2 | Corner transmission 150x150, 2 ML, security | 400-1520 | 450-2390 | K2012-00-N03 |
| 2A | Narrow corner transmission 50x150, security | 300-400 | 370-449 | K2006-00-N03 |
| ЗА | Stay arm 1, tilt first, L=450, 400-600 | 400-600 | - | K3014-05-N03 |
| ЗА | Stay arm 2, tilt first, L=650, 601-800 | 601-800 | - | K3014-07-N03 |
| ЗА | Stay arm 3, tilt first, L=890, 801-1040, security | 801-1040 | - | K3024-09-N03 |
| ЗА | Stay arm 4, tilt first, L=1130, 1041-1280, security | 1041-1280 | - | K3024-11-N03 |
| 4 | Middle lock L=400, 2 ML, security | 600-1000 | 600-1000 | K4024-04-N03 |
| 4 | Middle lock L=650, 2 ML, security | 850-1250 | 850-1250 | K4024-06-N03 |
| 4 | Middle lock L=820, 2 ML, security | 1251-1430 | 1251-1430 | K4024-08-N03 |
| 4 | Middle lock L=1130, 3 ML, security | - | 1251-1730 | K4024-11-N03 |
| 5 | Middle lock extension 480 mm, security | - | 1710-2210 | K4025-05-N03 |
| 5 | Middle lock extension 680 mm, security | - | 2211-2390 | K4025-07-N03 |
| 6 | Extension lock for corner transmission L=480 mm, security, croppable | 401-800 | - | K4036-05-N03 |
| 6 | Extension lock for corner transmission L=720 mm, security, croppable | 801-1280 | - | K4036-07-N03 |
| 7A | Locking plate security | - | - | *** |
| 7C | Locking plate, tilt first, left / right | - | - | *** |
| 8 | Lifting plate | - | 751-2390 | *** |
| 9 | Mishandling device with sash lifter | - | 751-2390 | A7001-00-N03 |
| 14 | Rebate corner hinge | - | 370-2390 | A5009-**-R/L03 |
| 15A | Frame hinges, 130 kg in one set | - | 370-2390 | A5020-99-N03 |
| 16 | Top sash hinge | - | 370-2390 | K5001-**-N03 |
| 17 | Hinges covers set | - | 370-2390 | A7098-99-N0* |
| 21 | Extension lock 240 mm, security | 1280-1520 | - | K4023-02-N03 |
| | * = Colour Related | | | |
| | ** = 9mm or 13mm Hinge | | | |
| | *** = Profile Related | | | |





ProSecure TBT window Locking System

with concealed hinges

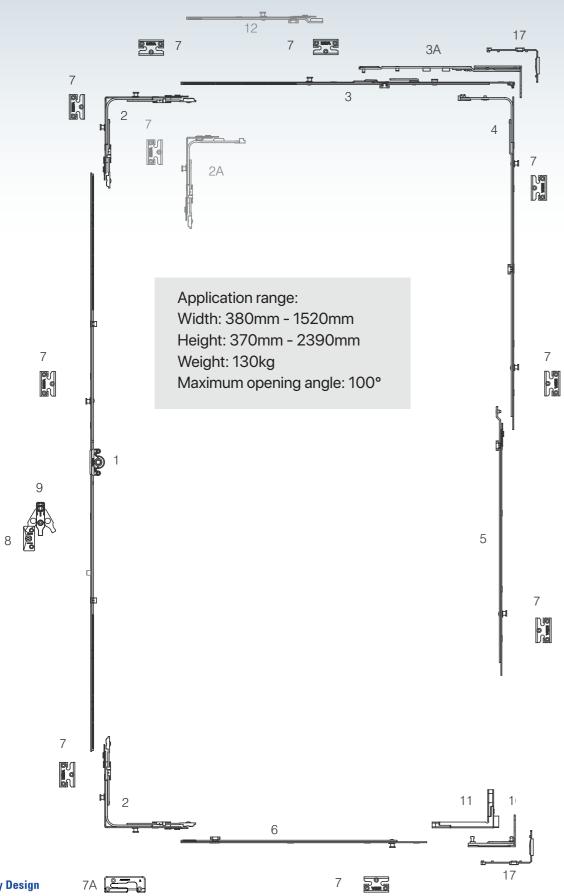

| No. | Description | Application range by width | Application range by height | Part No. |
|-----|--|----------------------------|-----------------------------|----------------|
| 1 | Gear variable 0, L=250, 450-550 | - | 450-550 | K1131-02-N03 |
| 1 | Gear variable 1, L=450, 551-750 | - | 551-750 | K1131-04-N03 |
| 1 | Gear variable 2, L=930, 751-1230, 1 ML, security | - | 751-1230 | K1131-09-N03 |
| 1 | Gear variable 3, L=1130, 950-1430, 1 ML, security | - | 950-1430 | K1131-11-N03 |
| 1 | Gear variable 4, L=1410, 1231-1710, 2 ML, security | - | 1231-1710 | K1131-14-N03 |
| 1 | Gear variable 5, L=1610, 1431-1910, 2 ML, security | - | 1431-1910 | K1131-16-N03 |
| 1 | Gear variable 6,L=2090, 1911-2390, 3 ML, security | - | 1911-2390 | K1131-21-N03 |
| 2 | Corner transmission 150x150, 2 ML, security | 481-1280 | 450-2390 | K2012-00-N03 |
| 2A | Narrow corner transmission 50x150, security | 380-480 | 370-449 | K2006-00-N03 |
| 3 | K3 Concealed Stay Arm Connecting Plate L=565 | 380-680 | - | K3030-06-R/L03 |
| 3 | K3 Concealed Stay Arm Connecting Plate L=685 | 681-800 | - | K3030-07-R/L03 |
| 3 | K3 Concealed Stay Arm Connecting Plate L=925 | 801-1040 | - | K3030-09-R/L03 |
| 3 | K3 Concealed Stay Arm Connecting Plate L=1165 | 1041-1280 | - | K3030-12-R/L03 |
| ЗА | Concealed Tilt First Stay Arm, PVC 13mm | 380-800 | - | A3005-02-R/L03 |
| ЗА | Concealed Tilt First Stay Arm, PVC 13mm | 801-1040 | - | A3005-03-R/L03 |
| ЗА | Concealed Tilt First Stay Arm, PVC 13mm | 1041-1280 | - | A3005-04-R/L03 |
| 4 | Middle lock L=400, 2 ML, security | - | 600-1000 | K4024-04-N03 |
| 4 | Middle lock L=650, 2 ML, security | - | 850-1250 | K4024-06-N03 |
| 4 | Middle lock L=820, 2 ML, security | - | 1251-1430 | K4024-08-N03 |
| 4 | Middle lock L=1130, 3 ML, security | - | 1251-1730 | K4024-11-N03 |
| 5 | Middle lock extension 480 mm, security | - | 1710-2210 | K4025-05-N03 |
| 5 | Middle lock extension 680 mm, security | - | 2211-2390 | K4025-07-N03 |
| 6 | Extension lock for corner transmission L=480 mm, security, croppable | 401-800 | - | K4036-05-N03 |
| 6 | Extension lock for corner transmission L=720 mm, security, croppable | 801-1280 | - | K4036-07-N03 |
| 7 | Locking plate security | - | = | *** |
| 7A | Locking plate, tilt first, left / right | - | - | *** |
| 8 | Lifting plate | - | 751-2390 | *** |
| 9 | Mishandling device with sash lifter | - | 751-2390 | A7001-00-N03 |
| 10 | Concealed Bottom Hinge, PVC 13mm | - | - | A5025-13-R/L03 |
| 11 | Concealed Bottom Sash Hinge 13mm | - | - | A5027-13-R/L03 |
| 17 | Concealed Hinge Packer | - | - | *** |
| 12 | Extension lock 240 mm, security | 1280-1520 | - | K4023-02-N03 |
| 12 | Extension lock 240mm, no cam | 1280-1520 | - | K4038-02-N03 |
| | * = Colour Related | | | |
| | ** = 9mm or 13mm Hinge | | | |
| | *** = Profile Related | | | |







Working with Experts

Mila has partnered with award-winning European hardware manufacturer AXOR to develop the ProSecure TBT system which offers enhanced security as standard.

AXOR is an established hardware manufacturer based in Ukraine with a purpose built factory which is ISO9001 quality accredited.

Mila is their exclusive distributor in the UK.

Contact Mila

T. 01327 312 400 | E. sales@mila.co.uk | W. mila.co.uk



