

MAXIMUM WEIGHTS, SIZES & PART NUMBERS

Description		Туре	Size	Stack Height	Max Rebate Width	Max Rebate Height	Max Opening	Max Weight	Part Number
TripleStay®	Side-hung	Standard	16"	14mm	900mm	1300mm	84 (+/- 2)	40kg	022836
TripleStay®	Side-hung	Standard	16"	17mm	900mm	1300mm	84 (+/- 2)	40kg	022846
•••••				• • • • • • • • • • • • • • • • • • • •				• • • • • • • • • • • • • • • • • • • •	
TripleStay®	Side-hung	Egress	12"	14mm	700mm	1200mm	84 (+/- 2)	30kg	022852
TripleStay®	Side-hung	Egress	16"	14mm	900mm	1300mm	88 (+/- 2)	40kg	022856
TripleStay®	Side-hung	Egress	12"	17mm	700mm	1200mm	84 (+/- 2)	30kg	022862
TripleStay®	Side-hung	Egress	16"	17mm	900mm	1300mm	88 (+/- 2)	40kg	022866
• • • • • • • • • • • • • • • • • • • •									
TripleStay®	Side-hung	Egress easy-clean	12"	14mm	700mm	1200mm	80	30kg	022872
TripleStay®	Side-hung	Egress easy-clean	16"	14mm	900mm	1300mm	88	40kg	022876
TripleStay®	Side-hung	Egress easy-clean	12"	17mm	700mm	1200mm	80	30kg	022882
TripleStay®	Side-hung	Egress easy-clean	16"	17mm	900mm	1300mm	88	40kg	022886

GUARANTEES & ACCREDITATIONS

10 years mechanical guarantee

2 years labour guarantee

PAS 24: 2012 (enhanced security performance)

BSEN 1670: Grade 5 (exceptionally high corrosion resistance)

BS6375-2 (operational performance and strength)

Police Preferred Specification - Secured by Design

Secured by Design



Police Preferred Specification

5 WAYS TO ORDER

Phone 01327 312 400 01327 872 575 Fax Online www.mila.co.uk sales@mila.co.uk E-mail

with your Mila field sales contact Face-to-face

DELIVERED NEXT DAY

We provide next day delivery as standard to UK mainland but if you want your hardware in a hurry we also offer next day pre 9am, pre noon or even a specific day, just ask.




TripleStay® for Triple Glazing & Wide Side-Hung Sashes

For use in a standard profile system without the need for additional preparation. Energy efficient.





rebate width & 40kg weight





timber & aluminium applications



TRIPLESTAY® FRICTION STAY RANGE



Developed specifically for use with triple glazing in standard profile systems and wide side-hung sashes - no extra preparation, energy efficient.

To help fabricators achieve WER A ratings on their casement windows the TripleStay® range is 33% stronger than a standard side hung friction stav.

Designed by Mila's product development team, the robust arms easily carry the additional sash weight of triple glazed units, up to 40kg and rebate widths up to 900mm, whilst maintaining a smooth, easy-to-use operation.

The TripleStay® range can be fitted to standard profiles without any additional routing or modifications being necessary to the profile, meaning simple, speedy fabrication.

Manufactured from stainless steel, this range is suitable for coastal regions and areas of high pollution, such as cities and urban areas.

TripleStays® enable fabricators to produce wider windows and easily achieve the minimum 450mm egress opening requirement to satisfy building regulations.

The range has been successfully tested to PAS24: 2012, BSEN 1670: Grade 5, BS6375-2 and meets the Policed Preferred Specification requirements of Secured by Design.

The range includes three versions of stay - standard with black nylon end-

cap, egress with emergency exit green nylon end-cap, and egress easy-clean that automatically reengages after use in easy-clean mode.


TripleStays® are available in 12" and 16" side hung, and in 14mm and 17mm stack heights to suit all major casement profile systems.

Find more information at www.mila.co.uk




DIMENSIONAL DRAWINGS


TripleStay Standard - 16", 14mm and 17mm stack height

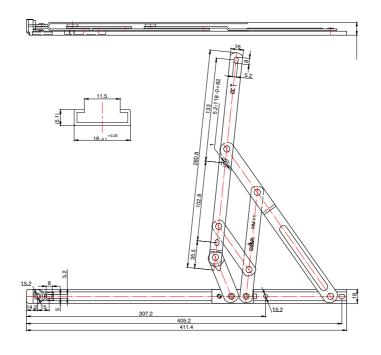

TripleStay Egress - 16", 14mm and 17mm stack height

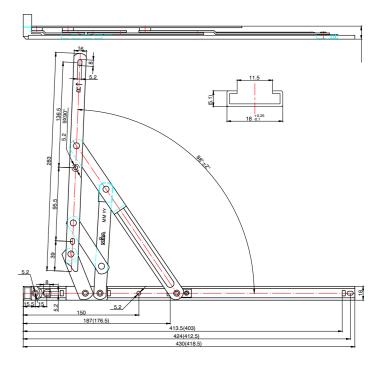

TripleStay Egress Easy-Clean - 16", 14mm and 17mm stack height

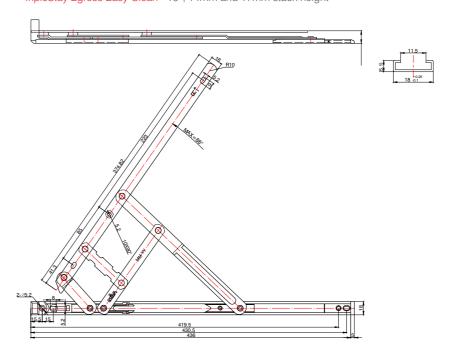

The full range of dimensional drawings for all versions and sizes of this product are available to download from our website at www.mila.co.uk