


Technical Data

Type	2 hook 2 roller, extendable
Operation	Lever/lever or lever/pad
Pz (mm)	92
Backset (mm)	35
Faceplate (mm)	16

Material Specification

Lock case	Steel acc. En 10149 zinc plated
Face plate	Steel acc. En 10149
Latch bolt	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Deadbolt	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Hook bolt	Steel/ nickel plated En 12540
Spindle square	Brass acc. DIN 1709
Handle-spring housing	Zinc diecasting acc.. 1743-2
Handle-spring	Steel acc. En 2076
Drive gear	Steel acc. En 10149
Slider	Steel acc. En 10149/zinc plated
Tumbler	Zinc diecasting acc. 1743-2 /nickel plated En 12540
Tumber spring	Steel acc. DIN 2076-D
Box Quantity	5

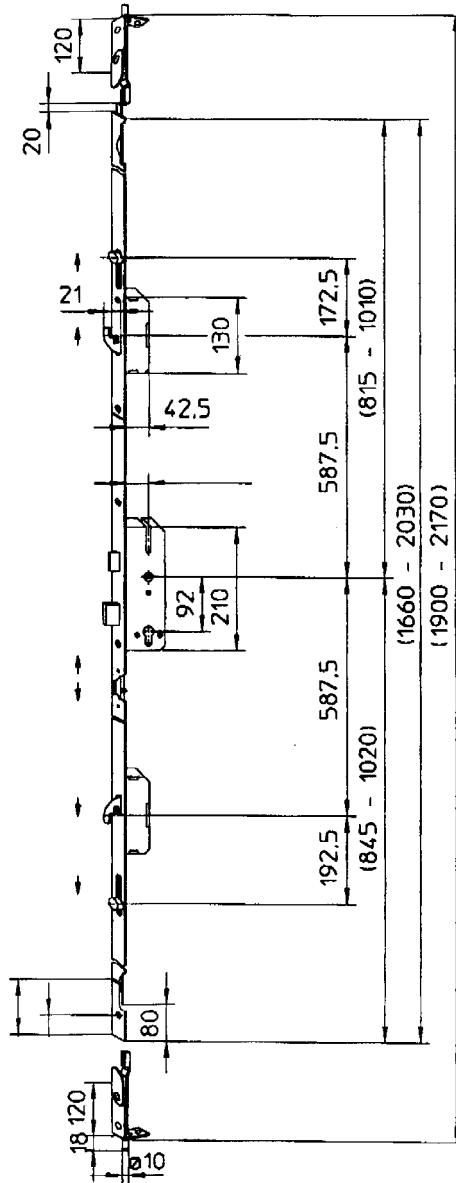

AS 7921 2 Hook, 2 Roller

The AS 7921 multipoint lock can be utilised in it's basic form as a high security residential door lock, to provide "rim latch" type operation through the use of a split spindle, or as the master door lock on a pair of french doors through the addition of shootbolts top and bottom.

A lever operated multipoint lock, it features 2 hardened steel hooks, 2 brass roller cams, a reversible latch and an anti-saw deadbolt as standard. It suits all standard 92mm Pz handles - no special requirements.

- Twin hardened steel, bi-directional hooks for security and adjustable roller cams for compression
- Lever/Lever - Lever/Pad - One Lock - All Options
- Option of standard lever/lever or "day latch" operation without modification, therefore reducing stock requirements
- Option of adding shootbolts top and bottom for high security residential or french doors
- Full french door suite available within the range, including slave door lock with adjustable striker

Part Numbers

Description	Type	Backset (mm)	Hooks	Rollers	Part No.
As 7921 W3 XL		35	2	2	047832
Normal action shootbolt	Standard		-	-	046310J

Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years



to place your order simply call our sales team direct on 01327 312 400